

PACSystems™

BATTERY MODULE

(IC693ACC400)



Warning Notes as Used in this Publication



Warning

Warning notices are used in this publication to emphasize that hazardous voltages, currents, temperatures, or other conditions that could cause personal injury exist in this equipment or may be associated with its use.

In situations where inattention could cause either personal injury or damage to equipment, a Warning notice is used.

Notes: Notes merely call attention to information that is especially significant to understanding and operating the equipment.

These instructions do not purport to cover all details or variations in equipment, nor to provide for every possible contingency to be met during installation, operation, and maintenance. The information is supplied for informational purposes only, and Emerson makes no warranty as to the accuracy of the information included herein. Changes, modifications, and/or improvements to equipment and specifications are made periodically and these changes may or may not be reflected herein. It is understood that Emerson may make changes, modifications, or improvements to the equipment referenced herein or to the document itself at any time. This document is intended for trained personnel familiar with the Emerson products referenced herein.

Emerson may have patents or pending patent applications covering subject matter in this document. The furnishing of this document does not provide any license whatsoever to any of these patents.

Emerson provides the following document and the information included therein as-is and without warranty of any kind, expressed or implied, including but not limited to any implied statutory warranty of merchantability or fitness for particular purpose.

Introduction

The IC693ACC400 Battery Module provides an extended memory backup time compared to that of the standard memory backup batteries for Series 90-30. The Battery Module replaces the standard CPU RAM backup battery in your control system.

Compatibility

The IC693ACC400 battery can **only** be used with the following Series 90-30 power supplies:

IC693PWR321	IC693PWR325	IC694PWR330
IC694PWR321	BP693PWR326	IC693PWR331 version B or earlier
IC693PWR322	IC693PWR330	IC694PWR331 version B or earlier
HIC693PWR322	HIC693PWR330	IC693PWR332
IC693PWR324	CE693PWR330	HIC693PWR332

Specifications


Parameter	Specification
Battery capacity	7.5 Amp-hours
Physical dimensions	2.62mm diameter x 50mm high (0.10in. x 1.9in.) cylinder
Connection	10cm (3.9in.) lead with female 2-pin connector; Compatible with the battery connectors on Series 90-30 power supplies.
Operating temperature range	0°C to 60°C
Nominal shelf life	5 years

Installing the Battery

⚠ WARNING

- To avoid losing the contents of RAM memory, you can carefully perform the following steps with PLC power ON. This procedure should be performed only by qualified electrical personnel who are trained in applicable electrical safety rules and procedures.
- Failure to follow standard electrical safety practice can result in injury or death to personnel, damage to equipment, or both.

Note: Battery packs that have been in storage for several years (depending on the CPU type and how critical the application is) should be discarded because these units have a nominal shelf life of five years. To determine the age of the battery, refer to the manufacturer's date code, which is located on the product label on the front of the battery. To interpret the date code, refer to the manufacturer's web site.

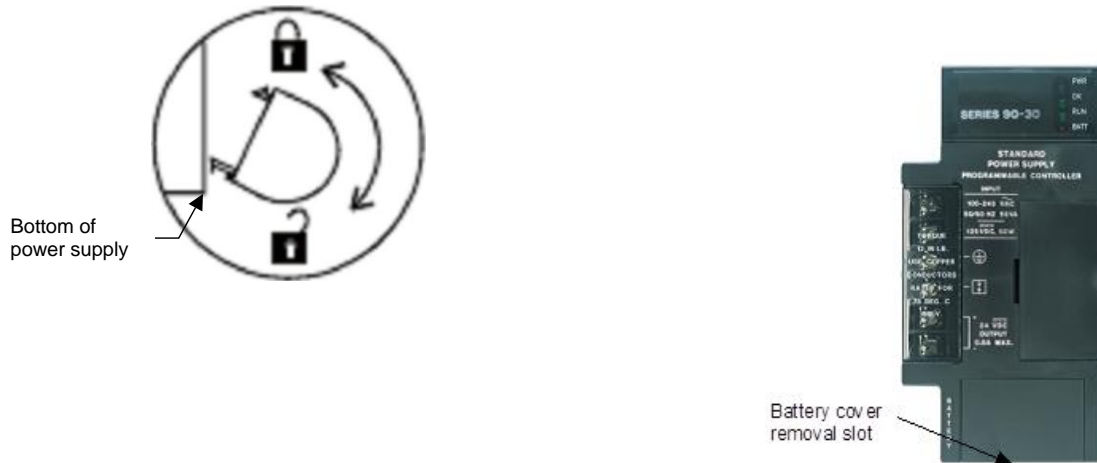

1. Carefully insert the tip of a small pocket size screwdriver into the battery cover removal slot, located beneath the battery cover. Gently rotate the screwdriver to loosen the cover.
2. Remove the cover with fingers. The battery is mounted in a clip on the back of the cover.
3. Carefully reach into battery compartment with your fingers (do not use a metal object to do this) and unplug the battery connector.
4. Remove the old battery from the clip and set it aside.
5. Unplug the clip and discard it.
6. Carefully reach into the battery compartment with your fingers (do not use a metal object to do this) and plug in the new battery connector.
7. Mount the battery module on the front of the power supply.

Disposal

When this product has expended its useful life, dispose of it safely and in accordance with the manufacturer's Material Safety Data Sheet (MSDS) provided with the battery.

Release History

Catalog Numbers	Date	Comments
IC693ACC400C	Sep 2019	Following Emerson's acquisition of this product, changes have been made to apply appropriate branding and registration of the product with required certification agencies. No changes to material, process, form, fit or functionality.
IC693ACC400B	Dec-2011	Vendor changed for battery parts. No change in form-fit-funcnionality.
IC693ACC400A	Oct-2010	Initial release

Related Documents

Series 90-30 Installation Manual, GFK-0356

Auxiliary Battery Module, GFK-2124

Nominal Battery Life

An ACC400 battery that is used continuously (supplying current to memory circuits with PLC power off) at room temperature (25°C/77°F) has average life estimates as follows:

CPU Model	IC693ACC400 Estimated Average Life at 25°C/77°F
CPU311, CPU313, CPU323	5 years
CPU350-DJ and earlier	5 years
CPU350-EJ and later	3 years
CPU374	7.2 months

Note: If your application requires greater backup capacity, an external IC693ACC302 Auxiliary Battery Module is recommended. For specifications, refer to the Important Product Information document, GFK-2124.

Technical Support & Contact Information

Home link: <http://www.Emerson.com/Industrial-Automation-Controls>

Knowledge Base: <https://www.emerson.com/Industrial-Automation-Controls/support>

Note: If the product is purchased through an Authorized Channel Partner, please contact the seller directly for any support.

Emerson reserves the right to modify or improve the designs or specifications of the products mentioned in this manual at any time without notice. Emerson does not assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use and maintenance of any Emerson product remains solely with the purchaser.

© 2019 Emerson. All rights reserved.

Emerson Terms and Conditions of Sale are available upon request. The Emerson logo is a trademark and service mark of Emerson Electric Co. All other marks are the property of their respective owners.

